


Impact Wrench




Please wear proper safety gear while working.

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip



Twin Hammer

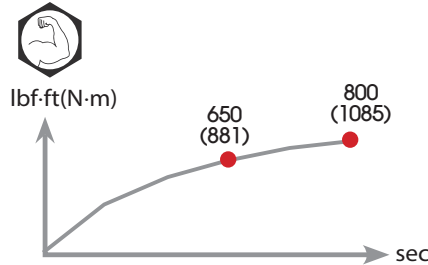

1/2"
33431



KT NO.	Square drive Inch mm	Type Std/Long anvil	Std. bolt size Inch mm	Free speed R.P.M	Max. torque lbf-ft N·m	Overall length Inch mm	Air inlet Inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S ²	Net weight kgs lbs
33431-065	1/2"	12.70 Std.anvil	3/4" M19	8000	650 881	6-7/8" 175	1/4"BSPT	3/8"	6.2 90	139 4.9	101.50	9.37	2.58 5.69 1 / 8

33611 / 33612

- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust



New Twin Hammer

3/4"
33611



3/4"
33621



3/4"
33612



3/4"
33622



KT NO.	Square drive Inch mm	Type Std/Long anvil	Std. bolt size Inch mm	Free speed R.P.M	Max. torque lbf-ft N·m	Overall length Inch mm	Air inlet Inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S ²	Net weight kgs lbs
33611-055	3/4"	19.05 Std. anvil	7/8" M20	6500	700 949	7-13/32" 188	1/4"BSPT	3/8"	6.2 90	125 4.4	96.56	8.64 3.00	6.61 1 / 8
33611-056	3/4"	19.05 Std. anvil	7/8" M20	6500	700 949	7-13/32" 188	1/4"NPT	3/8"	6.2 90	125 4.4	96.56	8.64 3.00	6.61 1 / 8
33612-055	3/4"	19.05 Long anvil	7/8" M20	6500	700 949	11-13/32" 290	1/4"BSPT	3/8"	6.2 90	125 4.4	96.86	6.17 3.40	7.50 1 / 8
33621-075	3/4"	19.05 Std. anvil	1" M24	6500	800 1085	8-63/64" 228	1/4"BSPT	3/8"	6.2 90	198 7.0	97.28	6.89 4.50	9.92 1 / 4
33621-076	3/4"	19.05 Std. anvil	1" M24	6500	800 1085	8-63/64" 228	1/4"NPT	3/8"	6.2 90	198 7.0	97.28	6.89 4.50	9.92 1 / 4
33622-075	3/4"	19.05 Long anvil	1" M24	6500	800 1085	12-63/64" 330	1/4"BSPT	3/8"	6.2 90	198 7.0	96.68	6.46 5.00	11.02 1 / 4
33622-076	3/4"	19.05 Long anvil	1" M24	6500	800 1085	12-63/64" 330	1/4"NPT	3/8"	6.2 90	198 7.0	96.68	6.46 5.00	11.02 1 / 4