

# Three-Legs Oil Filter Wrench

## 9AE42

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4" (63-102mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust
- **CW & CCW direction**


KT NO.	A B		Ø Capacity		g	kg
	inch	inch	inch	mm		
9AE42	1/2	3/8	2-1/4~4	63~102	395	12 / 48
9AE221	1/2	3/8	-	-	39	-
9AE423	-	3/8	2-1/2~4	63~102	356	12 / 48
9AE433	-	3/8	2-9/16~4-23/32	65~120	502	12 / 36



## 9AE43

- The claw-type filter is available for removing all oil filters from 3" to 4-3/4" (75-120mm) in diameter
- Suitable for 3/8" or 1/2" square drive tool
- Heavy duty design
- **CW & CCW direction**

KT NO.	A B		Ø Capacity		g	kg
	inch	inch	inch	mm		
9AE43	1/2	3/8	3~4-3/4	75~120	604	1 / 36

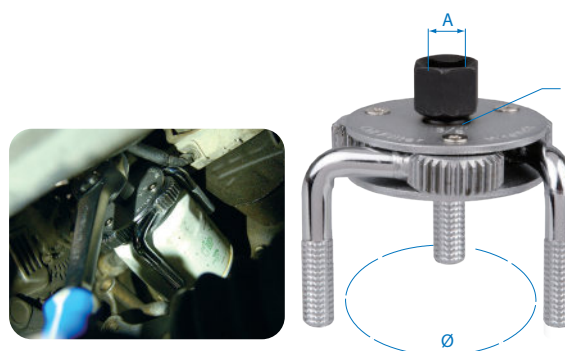


# Two Jaws Oil Filter Wrench

## 9AE52

- The claw-type filter is available for removing all oil filters from 2-3/8" to 3-1/8" (60-80mm) in diameter
- Suitable for using with 1/2" square drive tool
- Lost wax coating with electro-black oxide finish for protection against rust
- Specially teeth designed steel jaws

KT NO.	A		Ø Capacity		g	kg
	inch	inch	inch	mm		
9AE52	1/2		2-3/8~3-1/8	60~80	470	1 / 16

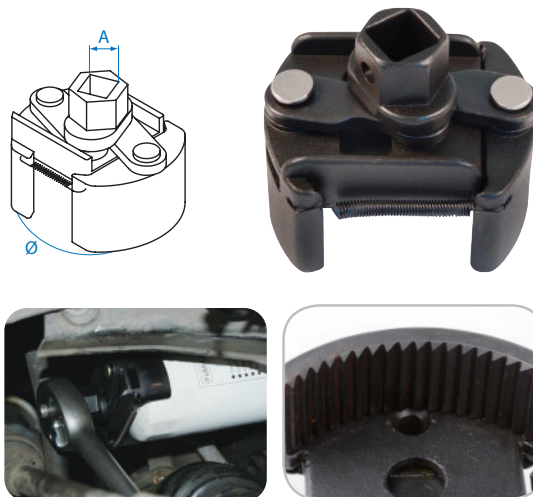

## 9AE53

- The claw-type filter is available for removing all oil filters from 3-1/8" to 4-1/2" (80-115mm) in diameter
- Suitable for using with 1/2" square drive tool
- Coated with electro-black oxide finish for protection against rust

KT NO.	A		Ø Capacity		g	kg
	inch	inch	inch	mm		
9AE53-115	1/2		3-1/8~4-1/2	80~115	667	6 / 24

