

Heavy Duty Adjustable Torque Wrench

Design for easy torque adjustment

Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010

Tolerance of torque $\pm 3\%$ (CW)


CW/CCW Direction



Video QR Code



3/4" & 1" No Push

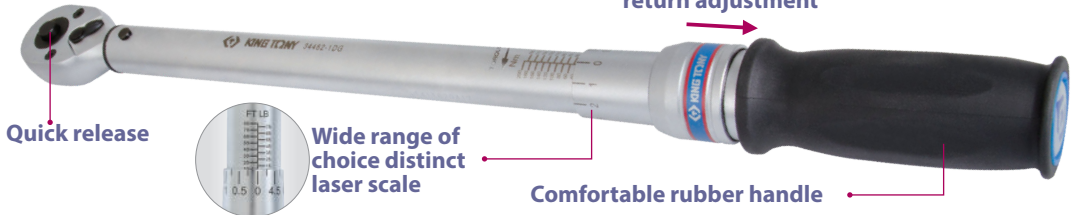

Dual Scale - English & Newton Meter (in-lb / ft-lb & N-m)

KT NO.	Gear teeth	Square drive	Torque range in-lb / ft-lb	Incr.	Torque range N-m	Incr.	Overall length mm		
34262-1CG	24	1/4"	40~200 in-lb	1 in-lb	5.1~22.0 N-m	0.12 N-m	324	640	1 / 12
34362-1CG	24	3/8"	40~200 in-lb	1 in-lb	5.1~22.0 N-m	0.12 N-m	324	640	1 / 12
34362-2CG	32	3/8"	15~80 ft-lb	0.5 ft-lb	23.7~105.1 N-m	0.7 N-m	435	1300	1 / 12
34462-1CG	32	1/2"	20~150 ft-lb	1 ft-lb	34~197 N-m	1.4 N-m	521	1590	1 / 12
34462-2CG	32	1/2"	50~250 ft-lb	1 ft-lb	75~332 N-m	1.4 N-m	613	1810	1 / 12
34662-1CG	24	3/4"	100~450 ft-lb	5 ft-lb	169~576 N-m	6.8 N-m	1048	5500	1 / 2
34662-2CG	24	3/4"	100~600 ft-lb	5 ft-lb	169~779 N-m	6.8 N-m	1234	5600	1 / 2
34662-3CG	24	3/4"	150~750 ft-lb	5 ft-lb	237~983 N-m	6.8 N-m	1238	6150	1 / 2
34862-1CG	24	1"	150~750 ft-lb	5 ft-lb	237~983 N-m	6.8 N-m	1238	6150	1 / 2

Single scale - Newton Meter (N-m)

KT NO.	Gear teeth	Square drive	Torque range N-m	Incr.	Overall length mm		
34262-1DG	24	1/4"	4~20 N-m	0.1 N-m	324	640	1 / 12
34262-2DG	24	1/4"	2~10 N-m	0.1 N-m	281	560	1 / 12
34262-3DG	24	1/4"	5~30 N-m	0.5 N-m	325	640	1 / 12
34362-1DG	24	3/8"	4~20 N-m	0.1 N-m	324	640	1 / 12
34362-2DG	32	3/8"	20~100 N-m	0.5 N-m	435	1300	1 / 12
34362-3DG	32	3/8"	10~60 N-m	0.5 N-m	325	700	1 / 12
34462-1DG	32	1/2"	40~200 N-m	1 N-m	521	1590	1 / 12
34462-2DG	32	1/2"	60~340 N-m	2 N-m	613	1810	1 / 12
34462-3DG	32	1/2"	20~100 N-m	1 N-m	436	1300	1 / 12
34462-4DG	32	1/2"	80~400 N-m	2 N-m	613	1970	1 / 12
34662-1DG	24	3/4"	100~600 N-m	5 N-m	1048	5500	1 / 2
34662-2DG	24	3/4"	150~800 N-m	5 N-m	1234	5600	1 / 2
34662-3DG	24	3/4"	200~1000 N-m	5 N-m	1238	6150	1 / 2
34862-1DG	24	1"	200~1000 N-m	5 N-m	1238	6150	1 / 2

- 34262-1DK
- 34362-1DK
- 34362-2DK: 34362-2xx / 3xx
- 34462-1DK
- 34462-3DK: 34462-3DG / 3GG
- 34662-1DK
- 34662-3DK1: 34662-3xxx series
- 34862-2DK: series

Single scale - English (in-lb / ft-lb)

KT NO.	Gear teeth	Square drive	Torque range in-lb / ft-lb	Incr.	Overall length mm		
34262-1EG	24	1/4"	40~200 in-lb	1 in-lb	324	640	1 / 12
34362-1EG	24	3/8"	40~200 in-lb	1 in-lb	324	640	1 / 12
34362-2EG	32	3/8"	15~80 ft-lb	0.5 ft-lb	435	1300	1 / 12
34462-1EG	32	1/2"	20~150 ft-lb	1 ft-lb	521	1590	1 / 12
34462-2EG	32	1/2"	50~250 ft-lb	1 ft-lb	613	1810	1 / 12
34662-1EG	24	3/4"	100~450 ft-lb	5 ft-lb	1048	5500	1 / 2
34662-2EG	24	3/4"	100~600 ft-lb	5 ft-lb	1234	5600	1 / 2
34662-3EG	24	3/4"	150~750 ft-lb	5 ft-lb	1238	6150	1 / 2
34662-4EG	24	3/4"	60~300 ft-lb	2 ft-lb	614	1800	1 / 12
34862-1EG	24	1"	150~750 ft-lb	5 ft-lb	1238	6150	1 / 2

Dual Scale - Newton Meter & English (N-m & ft-lb)

KT NO.	Gear teeth	Square drive	Torque range N-m	Incr.	Torque range ft-lb	Incr.	Overall length mm		
34262-1FG	24	1/4"	4~20	0.1 N-m	39.8~172.6 ft-lb	0.9 ft-lb	324	650	1 / 12
34362-2FG	32	3/8"	20~100 N-m	0.5 N-m	16.6~71.9 ft-lb	0.4 ft-lb	435	1320	1 / 12
34462-1FG	32	1/2"	40~200 N-m	1 N-m	33.2~143.8 ft-lb	0.8 ft-lb	521	1590	1 / 12
34462-2FG	32	1/2"	60~340 N-m	2 N-m	51.6~243.4 ft-lb	1.5 ft-lb	613	1720	1 / 12
34662-2FG	24	3/4"	150~800 N-m	5 N-m	129~572 ft-lb	4 ft-lb	1234	6110	1 / 2
34862-1FG	24	1"	200~1000 N-m	5 N-m	166~719 ft-lb	5 ft-lb	1238	6150	1 / 2

Dual Scale - Kilogram-force Centimeter / Kilogram-force meter & Newton Meter (kgf-cm / kgf-m & N-m)

KT NO.	Gear teeth	Square drive	Torque range kgf-cm / kgf-m	Incr.	Torque range N-m	Incr.	Overall length mm		
34262-1GG	24	1/4"	40~200 Kgf-cm	1 Kgf-cm	4.4~19.1 N-m	0.92 N-m	324	640	1 / 12
34362-1GG	24	3/8"	40~200 Kgf-cm	1 Kgf-cm	4.4~19.1 N-m	0.92 N-m	324	640	1 / 12
34362-2GG	32	3/8"	200~1000 Kgf-cm	5 Kgf-cm	22.1~95.6 N-m	0.46 N-m	435	1300	1 / 12
34462-1GG	32	1/2"	400~2000 Kgf-cm	10 Kgf-cm	44.1~191.2 N-m	0.46 N-m	521	1590	1 / 12
34462-2GG	32	1/2"	6~34 Kgf-m	0.2 Kgf-m	68.6~323.6 N-m	1.82 N-m	613	1810	1 / 12
34462-3GG	32	1/2"	200~1000 Kgf-cm	5 Kgf-cm	22.1~95.6 N-m	4.9 N-m	436	1470	1 / 12
34662-1GG	24	3/4"	10~60 Kgf-m	0.5 Kgf-m	123~564 N-m	4.9 N-m	1048	5500	1 / 2
34662-2GG	24	3/4"	15~80 Kgf-m	0.5 Kgf-m	172~760 N-m	4.9 N-m	1234	5600	1 / 2
34662-3GG	24	3/4"	20~100 Kgf-m	0.5 Kgf-m	221~956 N-m	4.9 N-m	1238	6150	1 / 2
34862-1GG	24	1"	20~100 Kgf-m	0.5 Kgf-m	221~956 N-m	4.9 N-m	1238	6150	1 / 2